

SETUP INSTRUCTIONS

Step 1: Remove frame and graphic from the carry bag.

Step 2: With “adjustable feet” on the floor, pull the up to open.

Step 3: Snap together all the locks and magnets. (A)

Step 4: If your graphic has “endcaps” wrap them around the sides and fasten to the Velcro from top to bottom.




Warning: Disengage all snap locks and graphic endcaps before collapsing the frame to avoid damage.

GRAPHIC INSTALLATION

Step 1: Open the frame and place it on it's back to the floor.

Step 2: Start with one corner by attaching the Velcro. Work your way along the edge to each corner.

Step 3: Adjust the tension by reworking the edges backward to the first corner.

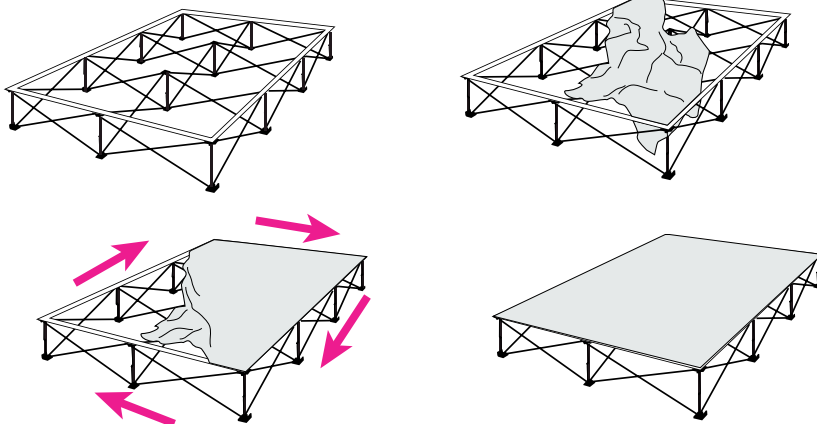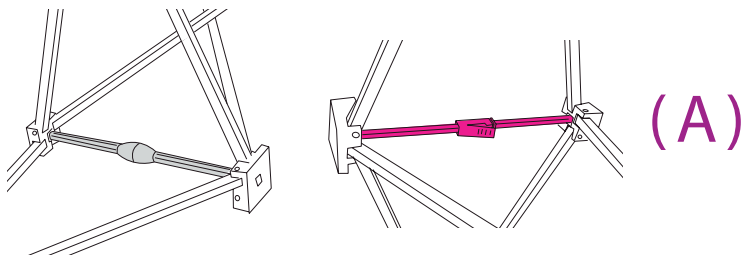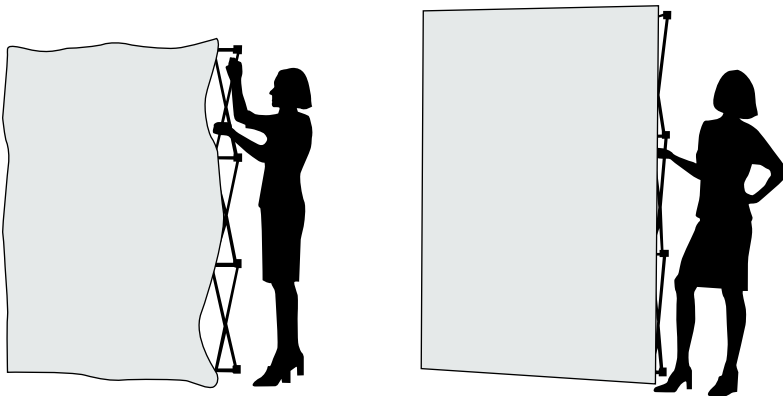

ASSEMBLED VIEW

